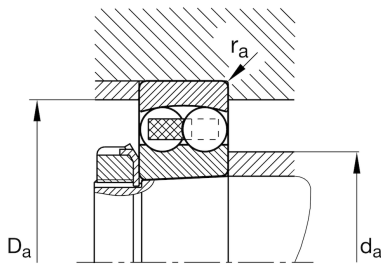
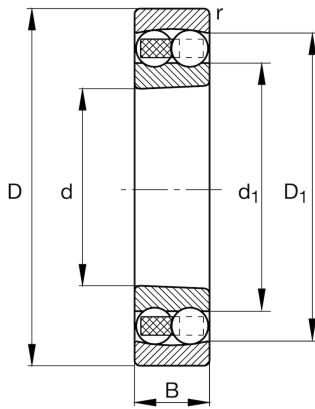
**FAG****1206-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 12..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	16 mm	Width
C_r	15.900 N	Basic dynamic load rating, radial
C_{0r}	4.650 N	Basic static load rating, radial
C_{ur}	295 N	Fatigue load limit, radial
n_G	13.100 1/min	Limiting speed
n_{gr}	11.400 1/min	Reference speed
$\approx m$	0,217 kg	Weight

Mounting dimensions

$d_{a \min}$	35,6 mm	Minimum diameter shaft shoulder
$d_{a \max}$	38 mm	Maximum diameter shaft shoulder
$D_{a \max}$	56,4 mm	Maximum diameter of housing shoulder
$d_{b \min}$	33 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1 mm	Maximum fillet radius

Dimensions

r_{\min}	1 mm	Minimum chamfer dimension
D_1	51,61 mm	Shoulder diameter outer ring
d_1	40,1 mm	Shoulder diameter inner ring

Temperature range


T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 09:40:23 CEST

SCHAEFFLER

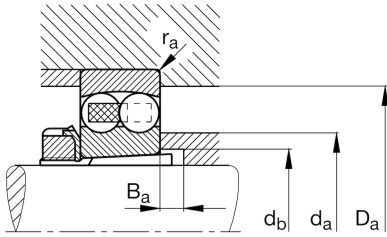

Calculation factors

e	0,25	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,54	Dynamic axial load factor
Y_2	3,93	Dynamic axial load factor
Y_0	2,66	Static axial load factor

Additional information

H206	Adapter sleeve
------	----------------