**FAG****1210-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 12..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	20 mm	Width
C_r	22.900 N	Basic dynamic load rating, radial
C_{0r}	8.100 N	Basic static load rating, radial
C_{ur}	520 N	Fatigue load limit, radial
n_G	8.700 1/min	Limiting speed
n_{gr}	7.700 1/min	Reference speed
$\approx m$	0,506 kg	Weight

Mounting dimensions

$d_{a \min}$	57 mm	Minimum diameter shaft shoulder
$d_{a \max}$	62 mm	Maximum diameter shaft shoulder
$D_{a \max}$	83 mm	Maximum diameter of housing shoulder
$d_{b \min}$	53 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1 mm	Maximum fillet radius

Dimensions

r_{\min}	1,1 mm	Minimum chamfer dimension
D_1	77,13 mm	Shoulder diameter outer ring
d_1	62,7 mm	Shoulder diameter inner ring

Temperature range


T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 10:26:54 CEST

SCHAEFFLER

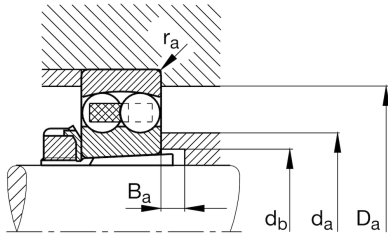

Calculation factors

e	0,2	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	3,15	Dynamic axial load factor
Y_2	4,87	Dynamic axial load factor
Y_0	3,3	Static axial load factor

Additional information

H210	Adapter sleeve
------	----------------