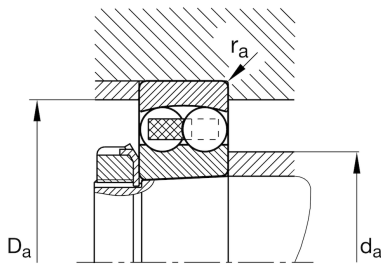
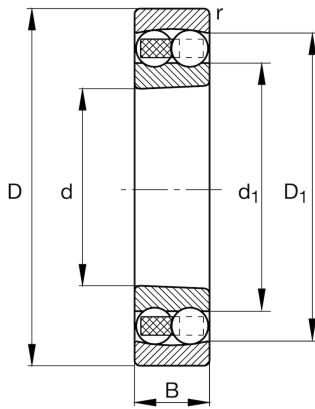
**FAG****1213-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 12..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	65 mm	Bore diameter
D	120 mm	Outside diameter
B	23 mm	Width
C_r	31.000 N	Basic dynamic load rating, radial
C_{0r}	12.500 N	Basic static load rating, radial
C_{ur}	790 N	Fatigue load limit, radial
n_G	6.500 1/min	Limiting speed
n_{gr}	5.800 1/min	Reference speed
$\approx m$	1,108 kg	Weight

Mounting dimensions

$d_{a \min}$	74 mm	Minimum diameter shaft shoulder
$d_{a \max}$	83 mm	Maximum diameter shaft shoulder
$D_{a \max}$	111 mm	Maximum diameter of housing shoulder
$d_{b \min}$	70 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	6 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1,5 mm	Maximum fillet radius

Dimensions

r_{\min}	1,5 mm	Minimum chamfer dimension
D_1	102,68 mm	Shoulder diameter outer ring
d_1	85,2 mm	Shoulder diameter inner ring

Temperature range


T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 11:07:59 CEST

SCHAEFFLER

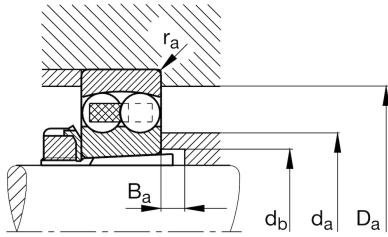

Calculation factors

e	0,18	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	3,58	Dynamic axial load factor
Y_2	5,53	Dynamic axial load factor
Y_0	3,75	Static axial load factor

Additional information

H213	Adapter sleeve
------	----------------