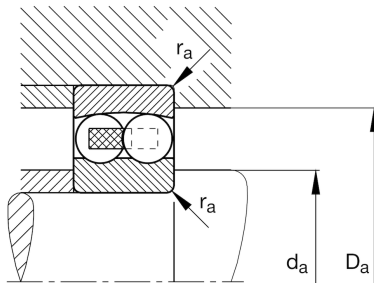
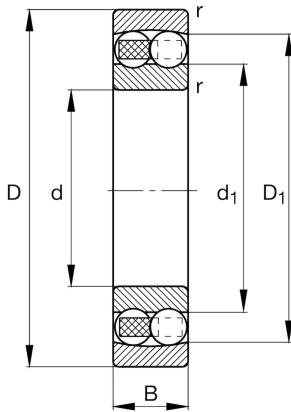
**FAG****1222-M-C3**

Self-aligning ball bearing

Self-aligning ball bearing 12..-M, solid brass cage

Technical information

**Main Dimensions & Performance Data**

| | | |
|-------------|-------------|-----------------------------------|
| d | 110 mm | Bore diameter |
| D | 200 mm | Outside diameter |
| B | 38 mm | Width |
| C_r | 89.000 N | Basic dynamic load rating, radial |
| C_{0r} | 38.500 N | Basic static load rating, radial |
| C_{ur} | 1.960 N | Fatigue load limit, radial |
| n_G | 5.300 1/min | Limiting speed |
| n_{gr} | 4.200 1/min | Reference speed |
| $\approx m$ | 5,35 kg | Weight |

Mounting dimensions

| | | |
|--------------|--------|--------------------------------------|
| $d_{a \min}$ | 122 mm | Minimum diameter shaft shoulder |
| $D_{a \max}$ | 188 mm | Maximum diameter of housing shoulder |
| $r_{a \max}$ | 2,1 mm | Maximum fillet radius |

Dimensions

| | | |
|------------|-----------|------------------------------|
| r_{\min} | 2,1 mm | Minimum chamfer dimension |
| D_1 | 173,18 mm | Shoulder diameter outer ring |
| d_1 | 140,2 mm | Shoulder diameter inner ring |

Temperature range

| | | |
|------------|--------|----------------------------|
| T_{\min} | -30 °C | Operating temperature min. |
| T_{\max} | 150 °C | Operating temperature max. |

Calculation factors

| | | |
|-------|------|--|
| e | 0,17 | Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y |
| Y_1 | 3,63 | Dynamic axial load factor |
| Y_2 | 5,62 | Dynamic axial load factor |
| Y_0 | 3,8 | Static axial load factor |