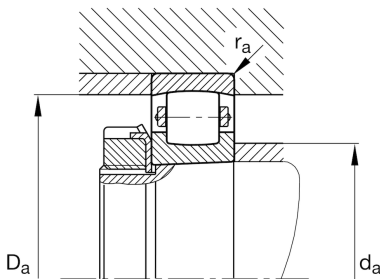
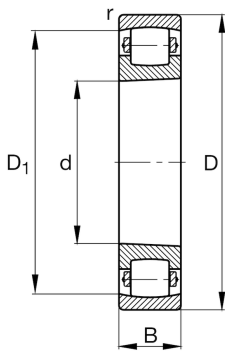
**FAG****20210-K-TVP-C3** [↗](#)

Barrel roller bearing

Barrel roller bearing 202..-K-TVP

Technical information

**Main Dimensions & Performance Data**

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	20 mm	Width
C _r	59.000 N	Basic dynamic load rating, radial
C _{0r}	69.000 N	Basic static load rating, radial
C _{ur}	7.200 N	Fatigue load limit, radial
n _G	7.700 1/min	Limiting speed
≈m	0,472 kg	Weight

Mounting dimensions

d _{a min}	57 mm	Minimum diameter shaft shoulder
D _{a max}	83 mm	Maximum diameter of housing shoulder
r _{a max}	1 mm	Maximum recess radius
d _{a max}	61 mm	Maximum diameter of shaft shoulder
d _{b min}	53 mm	Minimum cavity diameter of the sleeve
B _{a min}	5 mm	Minimum cavity width of the sleeve

Dimensions

r _{min}	1,1 mm	Minimum chamfer dimension
D ₁	79,5 mm	Bore diameter outer ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

H210	Adapter sleeve
------	----------------