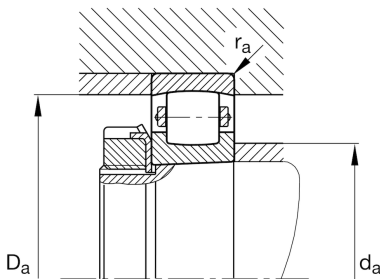
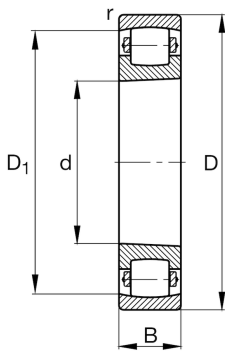
**FAG****20224-K-MB-C3** [🔗](#)

Barrel roller bearing

Barrel roller bearing 202..-K-MB

## Technical information

**Main Dimensions & Performance Data**

d	120 mm	Bore diameter
D	215 mm	Outside diameter
B	40 mm	Width
$C_r$	305.000 N	Basic dynamic load rating, radial
$C_{0r}$	415.000 N	Basic static load rating, radial
$C_{ur}$	38.500 N	Fatigue load limit, radial
$n_G$	3.350 1/min	Limiting speed
$\approx m$	6,41 kg	Weight

**Mounting dimensions**

$d_{a \min}$	132 mm	Minimum diameter shaft shoulder
$D_{a \max}$	203 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2,1 mm	Maximum recess radius
$d_{a \max}$	143 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	127 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	13 mm	Minimum cavity width of the sleeve

**Dimensions**

$r_{\min}$	2,1 mm	Minimum chamfer dimension
$D_1$	191,1 mm	Bore diameter outer ring

**Temperature range**

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

**Additional information**

H3024	Adapter sleeve
-------	----------------