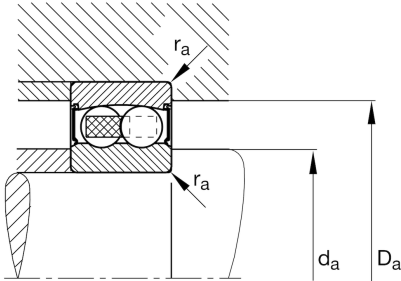
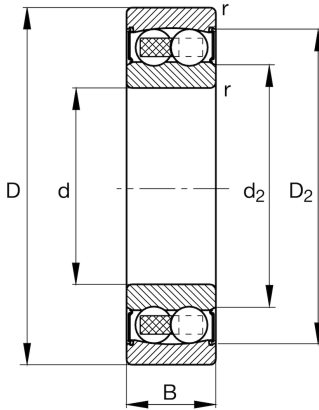
**FAG****2201-2RS-TVH>N** [↗](#)

Self-aligning ball bearing

Self-aligning ball bearing 22...-2RS-TVH,
seals, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	12 mm	Bore diameter
D	32 mm	Outside diameter
B	14 mm	Width
C_r	5.700 N	Basic dynamic load rating, radial
C_{0r}	1.270 N	Basic static load rating, radial
C_{ur}	80 N	Fatigue load limit, radial
n_G	15.500 1/min	Limiting speed
$\approx m$	0,053 kg	Weight

Mounting dimensions

$d_{a \min}$	16,2 mm	Minimum diameter shaft shoulder
$D_{a \max}$	27,8 mm	Maximum diameter of housing shoulder
$r_{a \max}$	0,6 mm	Maximum fillet radius

Dimensions

r_{\min}	0,6 mm	Minimum chamfer dimension
D_1	25,075 mm	Shoulder diameter outer ring
D_2	27,17 mm	Caliber diameter outer ring
d_1	18,2 mm	Shoulder diameter inner ring
d_2	16,2 mm	Caliber diameter inner ring

Temperature range

T_{\min}	-20 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.

Calculation factors

e	0,37	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,68	Dynamic axial load factor
Y_2	2,61	Dynamic axial load factor
Y_0	1,76	Static axial load factor