


FAG

2205-K-2RS-TVH-C3

Self-aligning ball bearing

Self-aligning ball bearing 22...-K-2RS-TVH, tapered bore taper 1:12, seals, plastic cage

Technical information

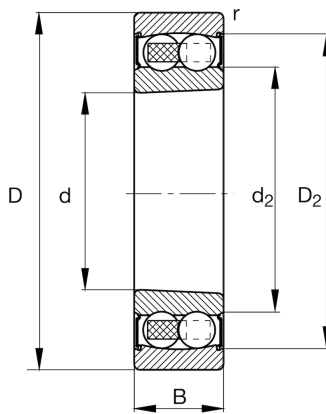

Main Dimensions & Performance Data

d	25 mm	Bore diameter
D	52 mm	Outside diameter
B	18 mm	Width
C_r	12.300 N	Basic dynamic load rating, radial
C_{0r}	3.300 N	Basic static load rating, radial
C_{ur}	209 N	Fatigue load limit, radial
n_G	8.500 1/min	Limiting speed
$\approx m$	0,16 kg	Weight

Mounting dimensions


$d_{a \min}$	30,6 mm	Minimum diameter shaft shoulder
$d_{a \max}$	32 mm	Maximum diameter shaft shoulder
$D_{a \max}$	46,4 mm	Maximum diameter of housing shoulder
$d_{b \min}$	28 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1 mm	Maximum fillet radius

Dimensions

r_{\min}	1 mm	Minimum chamfer dimension
D_1	43,596 mm	Shoulder diameter outer ring
D_2	45,27 mm	Caliber diameter outer ring
d_1	32,9 mm	Shoulder diameter inner ring
d_2	30,7 mm	Caliber diameter inner ring

Temperature range

T_{\min}	-20 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.

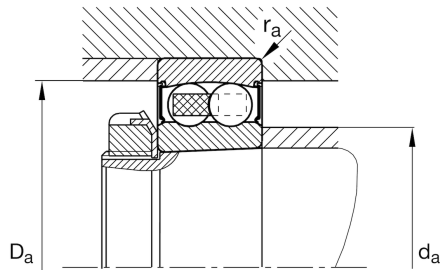



View product details on medias

22.04.2024, 16:13:23 CEST

SCHAEFFLER

Calculation factors

e	0,27	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,36	Dynamic axial load factor
Y_2	3,65	Dynamic axial load factor
Y_0	2,47	Static axial load factor

Additional information

H305	Adapter sleeve
------	----------------

