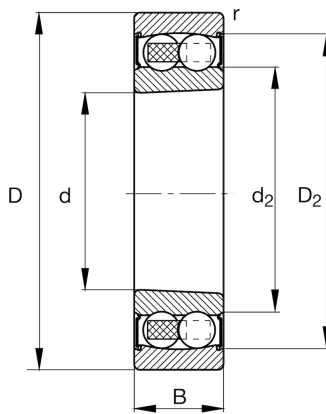
**FAG****2206-K-2RS-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 22...-K-2RS-TVH, tapered bore taper 1:12, seals, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	20 mm	Width
C_r	15.900 N	Basic dynamic load rating, radial
C_{0r}	4.650 N	Basic static load rating, radial
C_{ur}	295 N	Fatigue load limit, radial
n_G	7.100 1/min	Limiting speed
$\approx m$	0,26 kg	Weight

Mounting dimensions


$d_{a \min}$	35,6 mm	Minimum diameter shaft shoulder
$d_{a \max}$	38 mm	Maximum diameter shaft shoulder
$D_{a \max}$	56,4 mm	Maximum diameter of housing shoulder
$d_{b \min}$	33 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1 mm	Maximum fillet radius

Dimensions

r_{\min}	1 mm	Minimum chamfer dimension
D_1	51,56 mm	Shoulder diameter outer ring
D_2	53,33 mm	Caliber diameter outer ring
d_1	39,55 mm	Shoulder diameter inner ring
d_2	37,3 mm	Caliber diameter inner ring

Temperature range

T_{\min}	-20 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.

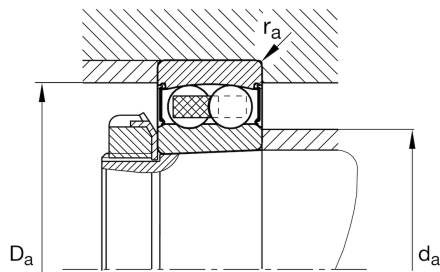



View product details on medias

22.04.2024, 16:14:27 CEST

SCHAEFFLER

Calculation factors

e	0,25	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,54	Dynamic axial load factor
Y_2	3,93	Dynamic axial load factor
Y_0	2,66	Static axial load factor

Additional information

H306	Adapter sleeve
------	----------------

