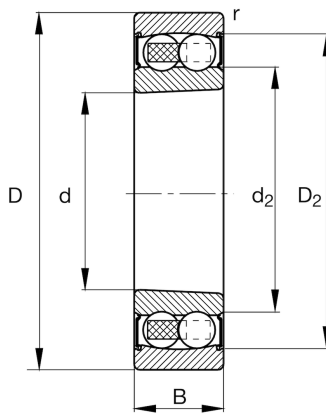
**FAG****2207-K-2RS-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 22...-K-2RS-TVH, tapered bore taper 1:12, seals, plastic cage

## Technical information

**Main Dimensions & Performance Data**

|             |             |                                   |
|-------------|-------------|-----------------------------------|
| d           | 35 mm       | Bore diameter                     |
| D           | 72 mm       | Outside diameter                  |
| B           | 23 mm       | Width                             |
| $C_r$       | 16.000 N    | Basic dynamic load rating, radial |
| $C_{0r}$    | 5.100 N     | Basic static load rating, radial  |
| $C_{ur}$    | 325 N       | Fatigue load limit, radial        |
| $n_G$       | 6.000 1/min | Limiting speed                    |
| $\approx m$ | 0,398 kg    | Weight                            |

**Mounting dimensions**


|              |       |                                       |
|--------------|-------|---------------------------------------|
| $d_{a \min}$ | 42 mm | Minimum diameter shaft shoulder       |
| $d_{a \max}$ | 45 mm | Maximum diameter shaft shoulder       |
| $D_{a \max}$ | 65 mm | Maximum diameter of housing shoulder  |
| $d_{b \min}$ | 39 mm | Minimum cavity diameter of the sleeve |
| $B_{a \min}$ | 5 mm  | Minimum cavity width of the sleeve    |
| $r_{a \max}$ | 1 mm  | Maximum fillet radius                 |

**Dimensions**

|            |          |                              |
|------------|----------|------------------------------|
| $r_{\min}$ | 1,1 mm   | Minimum chamfer dimension    |
| $D_1$      | 59,08 mm | Shoulder diameter outer ring |
| $D_2$      | 63,35 mm | Caliber diameter outer ring  |
| $d_1$      | 47,7 mm  | Shoulder diameter inner ring |
| $d_2$      | 43,5 mm  | Caliber diameter inner ring  |

**Temperature range**

|            |        |                            |
|------------|--------|----------------------------|
| $T_{\min}$ | -20 °C | Operating temperature min. |
| $T_{\max}$ | 100 °C | Operating temperature max. |

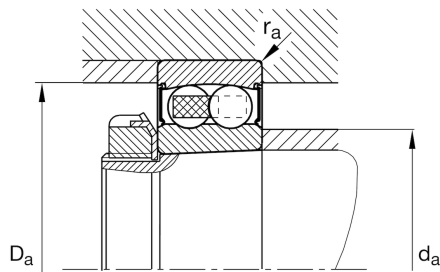



View product details on medias

22.04.2024, 16:15:34 CEST

SCHAEFFLER

### Calculation factors

|       |      |                                                                                      |
|-------|------|--------------------------------------------------------------------------------------|
| e     | 0,22 | Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y |
| $Y_1$ | 2,81 | Dynamic axial load factor                                                            |
| $Y_2$ | 4,35 | Dynamic axial load factor                                                            |
| $Y_0$ | 2,94 | Static axial load factor                                                             |

### Additional information

|      |                |
|------|----------------|
| H307 | Adapter sleeve |
|------|----------------|

