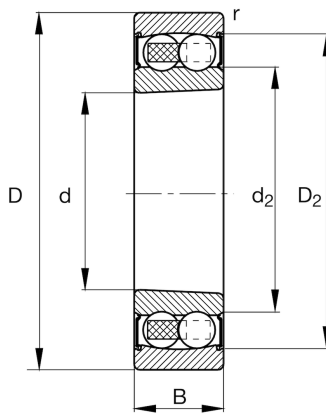
**FAG****2208-K-2RS-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 22...-K-2RS-TVH, tapered bore taper 1:12, seals, plastic cage

## Technical information

**Main Dimensions & Performance Data**

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	23 mm	Width
$C_r$	19.400 N	Basic dynamic load rating, radial
$C_{0r}$	6.500 N	Basic static load rating, radial
$C_{ur}$	415 N	Fatigue load limit, radial
$n_G$	5.400 1/min	Limiting speed
$\approx m$	0,486 kg	Weight

**Mounting dimensions**


$d_{a \min}$	47 mm	Minimum diameter shaft shoulder
$d_{a \max}$	52 mm	Maximum diameter shaft shoulder
$D_{a \max}$	73 mm	Maximum diameter of housing shoulder
$d_{b \min}$	43 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1 mm	Maximum fillet radius

**Dimensions**

$r_{\min}$	1,1 mm	Minimum chamfer dimension
$D_1$	67,3 mm	Shoulder diameter outer ring
$D_2$	70,34 mm	Caliber diameter outer ring
$d_1$	54 mm	Shoulder diameter inner ring
$d_2$	49,22 mm	Caliber diameter inner ring

**Temperature range**

$T_{\min}$	-20 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.

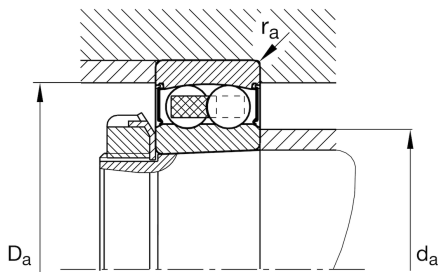



View product details on medias

22.04.2024, 16:16:33 CEST

SCHAEFFLER

### Calculation factors

e	0,22	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	2,91	Dynamic axial load factor
$Y_2$	4,51	Dynamic axial load factor
$Y_0$	3,05	Static axial load factor

### Additional information

H308	Adapter sleeve
------	----------------

