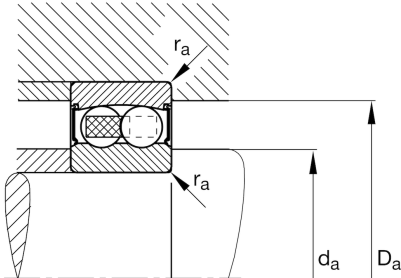
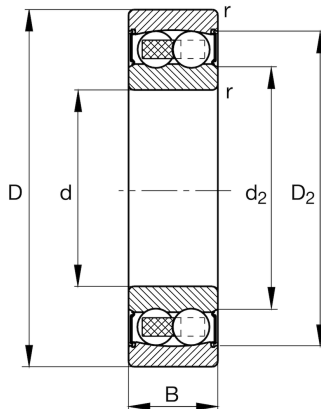
**FAG****2210-2RS-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 22..-2RS-TVH, seals, plastic cage

## Technical information

**Main Dimensions & Performance Data**

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
$C_r$	22.900 N	Basic dynamic load rating, radial
$C_{0r}$	8.100 N	Basic static load rating, radial
$C_{ur}$	520 N	Fatigue load limit, radial
$n_G$	4.400 1/min	Limiting speed
$\approx m$	0,578 kg	Weight

**Mounting dimensions**

$d_{a \min}$	57 mm	Minimum diameter shaft shoulder
$D_{a \max}$	83 mm	Maximum diameter of housing shoulder
$r_{a \max}$	1 mm	Maximum fillet radius

**Dimensions**

$r_{\min}$	1,1 mm	Minimum chamfer dimension
$D_1$	77,38 mm	Shoulder diameter outer ring
$D_2$	78,95 mm	Caliber diameter outer ring
$d_1$	62,7 mm	Shoulder diameter inner ring
$d_2$	60,48 mm	Caliber diameter inner ring

**Temperature range**

$T_{\min}$	-20 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.

**Calculation factors**

e	0,2	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	3,15	Dynamic axial load factor
$Y_2$	4,87	Dynamic axial load factor
$Y_0$	3,3	Static axial load factor