

**FAG****2212-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 22..-K-TVH,  
tapered bore taper 1:12, plastic cage

## Technical information

**Main Dimensions & Performance Data**

d	60 mm	Bore diameter
D	110 mm	Outside diameter
B	28 mm	Width
$C_r$	48.000 N	Basic dynamic load rating, radial
$C_{0r}$	16.500 N	Basic static load rating, radial
$C_{ur}$	1.040 N	Fatigue load limit, radial
$n_G$	6.300 1/min	Limiting speed
$n_{gr}$	6.400 1/min	Reference speed
$\approx m$	1,046 kg	Weight

**Mounting dimensions**

$d_{a \min}$	69 mm	Minimum diameter shaft shoulder
$d_{a \max}$	73 mm	Maximum diameter shaft shoulder
$D_{a \max}$	101 mm	Maximum diameter of housing shoulder
$d_{b \min}$	65 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	9 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1,5 mm	Maximum fillet radius

**Dimensions**

$r_{\min}$	1,5 mm	Minimum chamfer dimension
$D_1$	98,17 mm	Shoulder diameter outer ring
$d_1$	76,6 mm	Shoulder diameter inner ring

**Temperature range**


$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 17:20:44 CEST

SCHAEFFLER

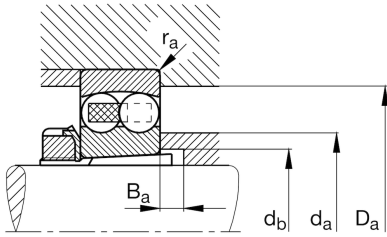

### Calculation factors

e	0,23	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	2,68	Dynamic axial load factor
$Y_2$	4,15	Dynamic axial load factor
$Y_0$	2,81	Static axial load factor

### Additional information

H312	Adapter sleeve
------	----------------