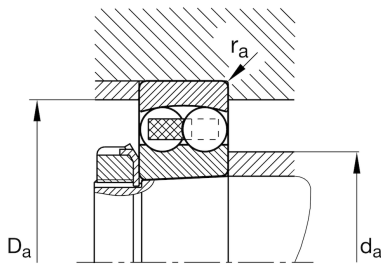
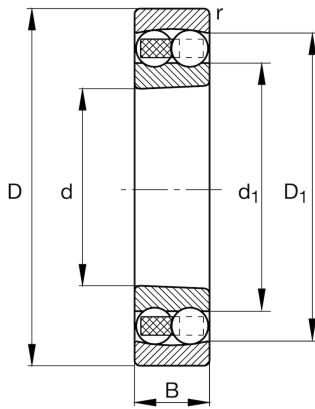
**FAG****2215-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 22..-K-TVH,  
tapered bore taper 1:12, plastic cage

## Technical information

**Main Dimensions & Performance Data**

d	75 mm	Bore diameter
D	130 mm	Outside diameter
B	31 mm	Width
$C_r$	44.500 N	Basic dynamic load rating, radial
$C_{0r}$	17.800 N	Basic static load rating, radial
$C_{ur}$	1.110 N	Fatigue load limit, radial
$n_G$	5.600 1/min	Limiting speed
$n_{gr}$	5.600 1/min	Reference speed
$\approx m$	1,54 kg	Weight

**Mounting dimensions**

$d_{a \min}$	84 mm	Minimum diameter shaft shoulder
$d_{a \max}$	90 mm	Maximum diameter shaft shoulder
$D_{a \max}$	121 mm	Maximum diameter of housing shoulder
$d_{b \min}$	80 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	12 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1,5 mm	Maximum fillet radius

**Dimensions**

$r_{\min}$	1,5 mm	Minimum chamfer dimension
$D_1$	114,3 mm	Shoulder diameter outer ring
$d_1$	93,34 mm	Shoulder diameter inner ring

**Temperature range**


$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 17:32:25 CEST

SCHAEFFLER

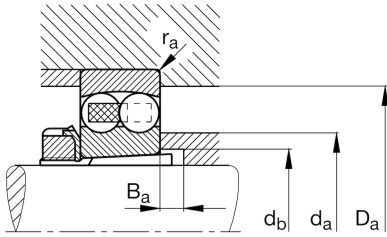

### Calculation factors

e	0,25	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	2,48	Dynamic axial load factor
$Y_2$	3,84	Dynamic axial load factor
$Y_0$	2,6	Static axial load factor

### Additional information

H315	Adapter sleeve
------	----------------