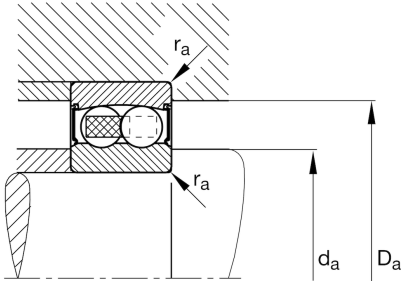
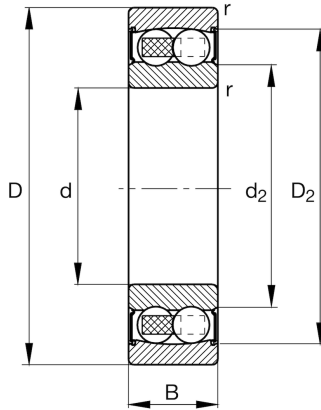
**FAG****2216-2RS-TVH**

Self-aligning ball bearing

Self-aligning ball bearing 22..-2RS-TVH, seals, plastic cage

## Technical information

**Main Dimensions & Performance Data**

d	80 mm	Bore diameter
D	140 mm	Outside diameter
B	33 mm	Width
$C_r$	40.000 N	Basic dynamic load rating, radial
$C_{0r}$	17.000 N	Basic static load rating, radial
$C_{ur}$	1.020 N	Fatigue load limit, radial
$n_G$	2.700 1/min	Limiting speed
$\approx m$	2,01 kg	Weight

**Mounting dimensions**

$d_{a \min}$	91 mm	Minimum diameter shaft shoulder
$D_{a \max}$	129 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2 mm	Maximum fillet radius

**Dimensions**

$r_{\min}$	2 mm	Minimum chamfer dimension
$D_1$	122,07 mm	Shoulder diameter outer ring
$D_2$	126,5 mm	Caliber diameter outer ring
$d_1$	101,95 mm	Shoulder diameter inner ring
$d_2$	98,3 mm	Caliber diameter inner ring

**Temperature range**

$T_{\min}$	-20 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.

**Calculation factors**

e	0,16	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	3,93	Dynamic axial load factor
$Y_2$	6,08	Dynamic axial load factor
$Y_0$	4,12	Static axial load factor