**FAG****2308-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 23...-K-TVH,  
tapered bore taper 1:12, plastic cage

## Technical information

**Main Dimensions & Performance Data**

d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	33 mm	Width
$C_r$	46.000 N	Basic dynamic load rating, radial
$C_{0r}$	13.500 N	Basic static load rating, radial
$C_{ur}$	860 N	Fatigue load limit, radial
$n_G$	7.900 1/min	Limiting speed
$n_{gr}$	8.700 1/min	Reference speed
$\approx m$	0,89 kg	Weight

**Mounting dimensions**

$d_{a \min}$	49 mm	Minimum diameter shaft shoulder
$d_{a \max}$	51 mm	Maximum diameter shaft shoulder
$D_{a \max}$	81 mm	Maximum diameter of housing shoulder
$d_{b \min}$	45 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	5 mm	Minimum cavity width of the sleeve
$r_{a \max}$	1,5 mm	Maximum fillet radius

**Dimensions**

$r_{\min}$	1,5 mm	Minimum chamfer dimension
$D_1$	74,51 mm	Shoulder diameter outer ring
$d_1$	53,7 mm	Shoulder diameter inner ring

**Temperature range**


$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 17:54:49 CEST

SCHAEFFLER

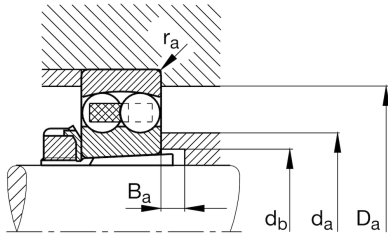

### Calculation factors

e	0,43	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	1,46	Dynamic axial load factor
$Y_2$	2,25	Dynamic axial load factor
$Y_0$	1,52	Static axial load factor

### Additional information

H2308	Adapter sleeve
-------	----------------