

**FAG****2312-K-TVH-C3**

Self-aligning ball bearing

Self-aligning ball bearing 23...-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	60 mm	Bore diameter
D	130 mm	Outside diameter
B	46 mm	Width
C_r	89.000 N	Basic dynamic load rating, radial
C_{0r}	28.000 N	Basic static load rating, radial
C_{ur}	1.790 N	Fatigue load limit, radial
n_G	5.200 1/min	Limiting speed
n_{gr}	6.700 1/min	Reference speed
$\approx m$	2,521 kg	Weight

Mounting dimensions

$d_{a \min}$	72 mm	Minimum diameter shaft shoulder
$d_{a \max}$	74 mm	Maximum diameter shaft shoulder
$D_{a \max}$	118 mm	Maximum diameter of housing shoulder
$d_{b \min}$	66 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	6 mm	Minimum cavity width of the sleeve
$r_{a \max}$	2,1 mm	Maximum fillet radius

Dimensions

r_{\min}	2,1 mm	Minimum chamfer dimension
D_1	108,54 mm	Shoulder diameter outer ring
d_1	76,95 mm	Shoulder diameter inner ring

Temperature range


T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.



View product details on medias

25.04.2024, 18:04:38 CEST

SCHAEFFLER

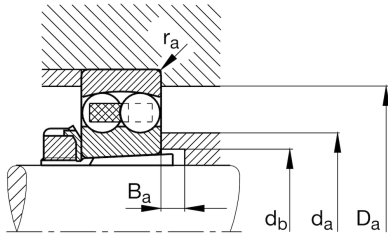

Calculation factors

e	0,41	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,55	Dynamic axial load factor
Y_2	2,39	Dynamic axial load factor
Y_0	1,62	Static axial load factor

Additional information

H2312	Adapter sleeve
-------	----------------