
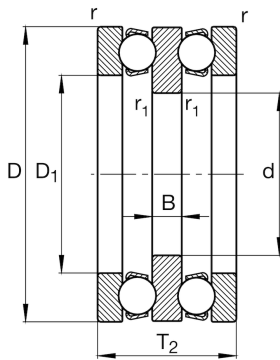
**FAG****52330-MP**

Axial deep groove ball bearing

Axial deep groove ball bearing 523...-MP,
double direction, solid brass cage

Technical information

**Main Dimensions & Performance Data**

d	130 mm	Inner diameter shaft washer
D	250 mm	Outer diameter housing washer
T ₂	140 mm	Height
C _a	395.000 N	Basic dynamic load rating, axial
C _{0a}	1.330.000 N	Basic static load rating, axial
C _{ua}	43.000 N	Fatigue load limit, axial
n _G	1.340 1/min	Limiting speed
n _{gr}	2.360 1/min	Reference speed
≈m	29,314 kg	Weight

Mounting dimensions

d _{a max}	150 mm	Maximum diameter shaft shoulder
D _{a max}	190 mm	Maximum diameter of housing shoulder
r _{a max}	2,1 mm	Maximum filled radius
r _{a1 max}	1 mm	Maximum filled radius

Dimensions

D ₁	154 mm	Inner diameter housing washer
B	31 mm	Height shaft washer
r _{min}	2,1 mm	Minimum chamfer dimension
r _{1 min}	1,1 mm	Minimum chamfer dimension

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.

Calculation factors

A	9,3	Minimum load factor
---	-----	---------------------