


FAG

HS71922-E-T-P4S-UL

Angular contact ball bearing

Spindle bearings HS719..-E, adjusted, in pairs or sets, contact angle $\alpha = 15^\circ$, restricted tolerances

Technical information

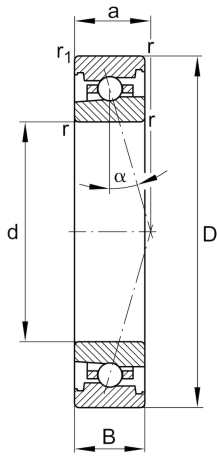

Main Dimensions & Performance Data



d	110 mm	Bore diameter
D	150 mm	Outside diameter
B	20 mm	Width
C_r	32.000 N	Basic dynamic load rating, radial
C_{0r}	27.000 N	Basic static load rating, radial
C_{ur}	2.500 N	Fatigue load limit, radial
$n_{G \text{ Grease}}$	11.000 1/min	Limiting speed for grease lubrication
$n_{G \text{ Oil}}$	17.000 1/min	Limiting speed for oil lubrication
$\approx m$	0,867 kg	Weight

Mounting dimensions

d_a	117 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	143 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a \text{ max}}$	0,6 mm	Maximum recess radius
$r_{a1 \text{ max}}$	0,6 mm	Maximum recess radius
$E_{tk \text{ min}}$	124,8 mm	Minimum diameter injection pitch
$E_{tk \text{ max}}$	126,9 mm	Maximum diameter injection pitch
$E_{tk1 \text{ min}}$	121,5 mm	Minimum diameter injection pitch
$E_{tk1 \text{ max}}$	126,9 mm	Maximum diameter injection pitch
a	40,3 mm	Distance between the apexes of the pressure cones

Dimensions

r_{min}	1,1 mm	Minimum chamfer dimension
$r_{1 \text{ min}}$	1,1 mm	Minimum chamfer dimension
α	25 °	Contact angle

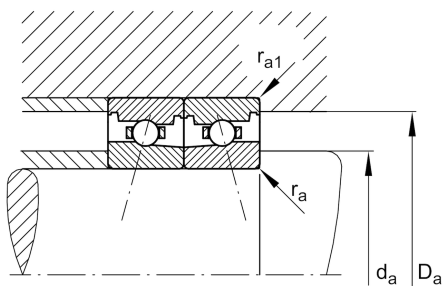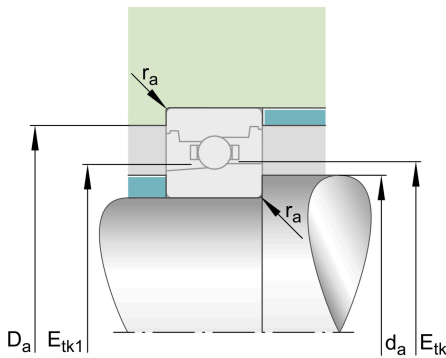



Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	100 °C	Operating temperature max.

Additional information

F_{VL}	187 N	Preload force light
F_{VM}	561 N	Preload force medium
F_{VH}	1.121 N	Preload force heavy
K_{aEL}	538 N	Lift-off force light
K_{aEM}	1.642 N	Lift-off force medium
K_{aEH}	3.344 N	Lift-off force heavy
C_{aL}	178 N/μm	Axial rigidity light
C_{aM}	264 N/μm	Axial rigidity medium
C_{aH}	343 N/μm	Axial rigidity heavy