


## ZKLF1762-2RS-PE

Axial angular contact ball bearing

Schaeffler ID:  
0021866590000

Axial angular contact ball bearing  
ZKLF..-2RS-PE, double direction, screw  
mounting

### Technical information


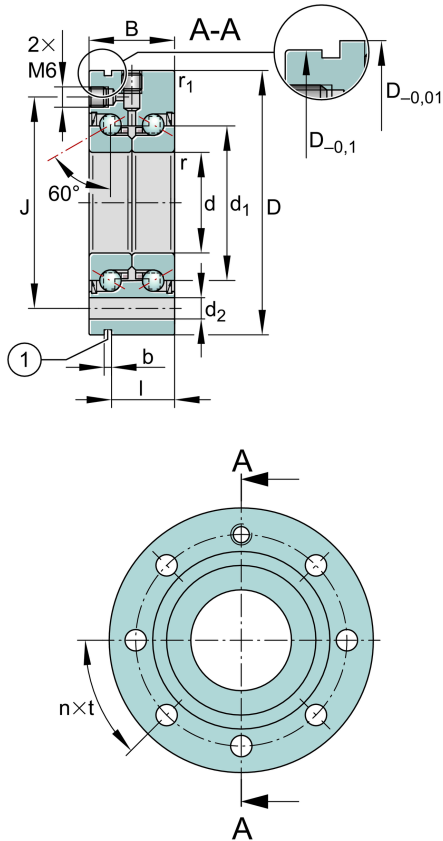


### Main Dimensions & Performance Data

d	17 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,01 mm	Bore diameter lower tolerance
D	62 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,013 mm	Outside diameter lower tolerance
B	25 mm	Width
	0 mm	Width upper tolerance
	-0,25 mm	Width lower tolerance
$C_a$	18.900 N	Basic dynamic load rating, axial
$C_{0a}$	31.500 N	Basic static load rating, axial
$C_{ua}$	1.440 N	Fatigue load limit, axial
$n_{G \text{ Grease}}$	7.600 1/min	Limiting speed for grease lubrication
$n_s$	3.300 1/min	Thermally safe operating speed
$M_R$	0,24 Nm	Bearing frictional torque
$\approx m$	0,452 kg	Weight

### Mounting dimensions

$D_{a \text{ max}}$	37 mm	Maximum diameter of housing
$d_{a \text{ min}}$	23 mm	Minimum diameter shaft
$t_1$	0,1 mm	Position tolerance of bore in the housing
	M6	Size of fixing screws
$n_a$	3	Number of holes in adjacent construction
$t_a$	120 °	Pitch separation angle of holes in adjacent construction
	M6	Connection thread for lubrication

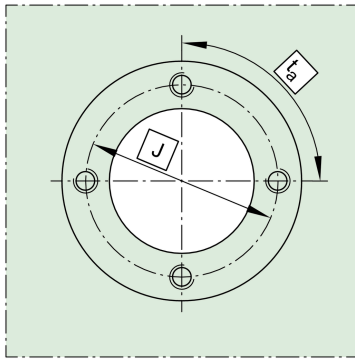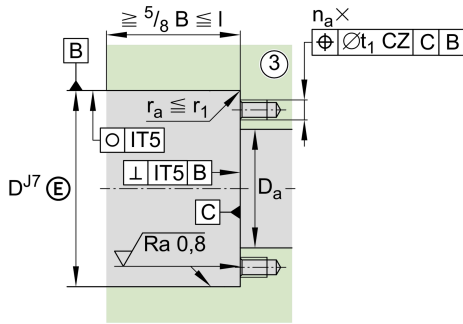

### Dimensions

$d_1$	30 mm	Rib diameter inner ring
$r_{\min}$	0,3 mm	Minimum chamfer dimension
$r_{1 \min}$	0,6 mm	Minimum chamfer dimension
$J$	48 mm	Pitch circle diameter fixing holes
$d_2$	6,8 mm	Fixing holes diameter
$b$	3 mm	Width of extraction slot
$l$	17 mm	Distance of extraction slot
$n$	6	Pitch quantity of fixing holes
$t$	60 °	Pitch separation angle of fixing holes
$a$	60 °	Contact angle

### Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

### Additional information

$c_{aL}$	450 N/μm	Rigidity axial
$c_{kL}$	80 Nm/mrad	Tilting rigidity
$M_m$	0,132 kg*cm <sup>2</sup>	Mass moment of inertia
	5 μm	Axial runout
	ZM17	Recommended INA precision locknut for radial locking
	AM17	Recommended INA precision locknut for axial locking
$M_A$	15 Nm	Tightening torque for the recommended INA precision locknut
	7.514 N	Required locknut force axial

