




## ZKLFA1563-2Z

Axial angular contact ball bearing

Schaeffler ID:  
0001307530000

Angular contact ball bearing units  
ZKLFA...-2Z, double direction, for screw  
mounting, gap seals on both sides

### Technical information

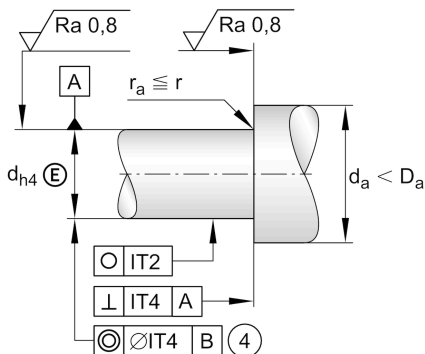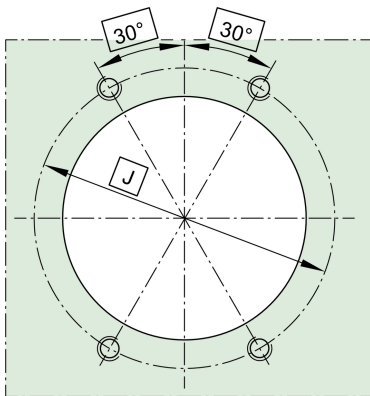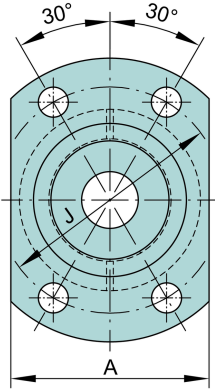

### Main Dimensions & Performance Data


d	15 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,005 mm	Bore diameter lower tolerance
D	42 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,01 mm	Outside diameter lower tolerance
B	25 mm	Width
	0 mm	Width upper tolerance
	-0,25 mm	Width lower tolerance
C <sub>a</sub>	18.000 N	Basic dynamic load rating, axial
C <sub>0a</sub>	28.500 N	Basic static load rating, axial
C <sub>ua</sub>	1.300 N	Fatigue load limit, axial
n <sub>G Grease</sub>	10.800 1/min	Limiting speed for grease lubrication
n <sub>g</sub>	7.000 1/min	Thermally permissible speed
≈m	0,26 kg	Weight

### Mounting dimensions

d <sub>a min</sub>	20 mm	Minimum diameter shaft shoulder
d <sub>a max</sub>	34 mm	Maximum diameter of shaft shoulder
t <sub>1</sub>	0,1 mm	position tolerance
	M6	Screw size
n <sub>a</sub>	4	Number of screws

### Dimensions

d <sub>1</sub>	28 mm	Rib diameter inner ring
r <sub>min</sub>	0,3 mm	Minimum chamfer dimension
r <sub>1 min</sub>	0,6 mm	Minimum chamfer dimension
B <sub>1</sub>	10 mm	Thickness of flange
d <sub>2</sub>	6,8 mm	Fixing boring diameter
J	53 mm	Pitch circle diameter (holes)
A	45 mm	Flange width

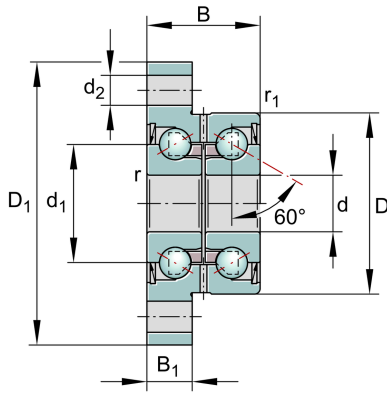

Temperature range

$T_{min}$	-30 °C	Operating temperature min.
$T_{max}$	120 °C	Operating temperature max.

Additional information

$M_{RL}$	0,1 Nm	Bearing friction torque
$c_{aL}$	400 N/μm	Rigidity axial
$c_{kL}$	65 Nm/mrad	Tilting stiffness
$M_m$	0,102 kg*cm <sup>2</sup>	Mass moment of inertia
	2 μm	Axial runout
	ZM15	recommended INA precision locknut for radial locking (not included)
	AM15	recommended INA precision locknut for axial locking (not included)
$M_A$	10 Nm	Tightening torque nut
	5.484 N	Locknut force axial

