

ZKLN0624-2RS-XL




Axial angular contact ball bearing

Schaeffler ID:
0017102060000

Axial angular contact ball bearing
ZKLN..-2RS-XL, double direction, no screw
mounting

X-life

Technical information

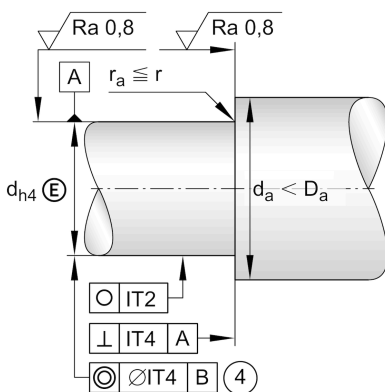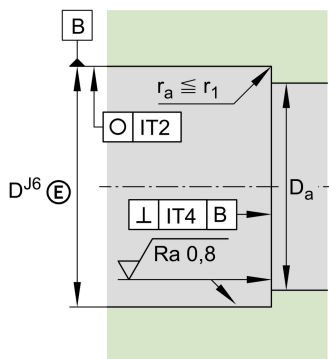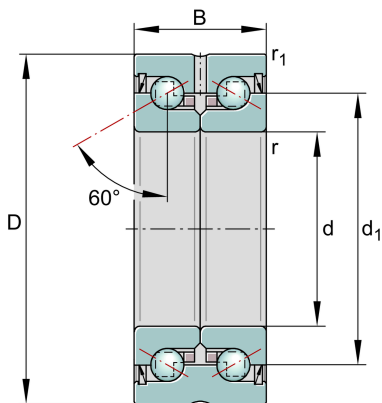

Main Dimensions & Performance Data

d	6 mm	Bore diameter
	0.002 mm	Bore diameter upper tolerance
	-0.003 mm	Bore diameter lower tolerance
D	24 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0.01 mm	Outside diameter lower tolerance
B	15 mm	Width
	0 mm	Width upper tolerance
	-0.25 mm	Width lower tolerance
C_a	7,600 N	Basic dynamic load rating, axial
C_{0a}	8,500 N	Basic static load rating, axial
C_{ua}	520 N	Fatigue load limit, axial
$n_{G \text{ Grease}}$	16,400 1/min	Limiting speed for grease lubrication
n_g	6,800 1/min	Thermally safe operating speed
M_R	0.04 Nm	Bearing frictional torque
$\approx m$	37 g	Weight

Mounting dimensions

$D_{a \text{ max}}$	19 mm	Maximum diameter of housing
$d_{a \text{ min}}$	9 mm	Minimum diameter shaft

Dimensions

d_1	14 mm	Rib diameter inner ring
r_{min}	0.3 mm	Minimum chamfer dimension
$r_{1 \text{ min}}$	0.6 mm	Minimum chamfer dimension
α	60 °	Contact angle

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Additional information

c_{aL}	200 N/ μm	Rigidity axial
c_{kL}	8 Nm/mrad	Tilting rigidity
M_m	0.0044 kg*cm ²	Mass moment of inertia
	2 μm	Axial runout
	ZM06	Recommended INA precision locknut for radial locking
M_A	2 Nm	Tightening torque for the recommended INA precision locknut
	2,404 N	Required locknut force axial