




ZKLN3062-2RS-PE

Axial angular contact ball bearing

Schaeffler ID:
0028060020000

Axial angular contact ball bearings
ZKLN..-2RS-PE, Increased tolerances,
double direction, lip seals on both sides

Technical information

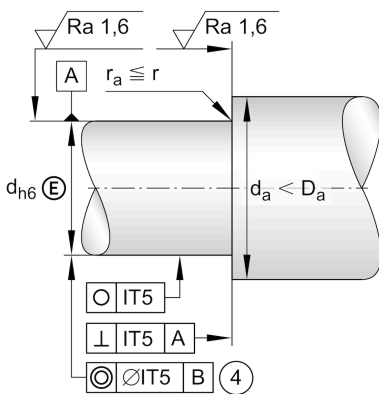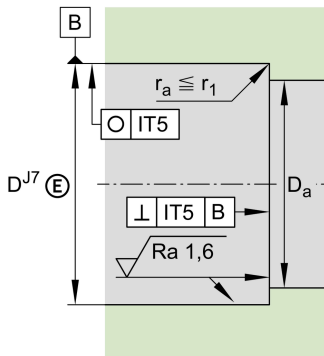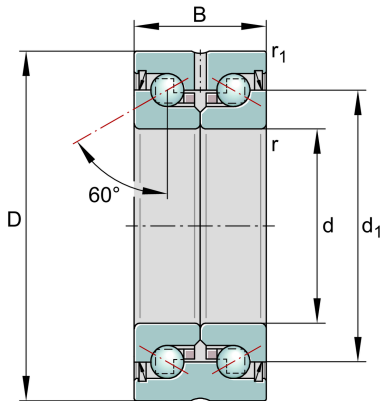

Main Dimensions & Performance Data

d	30 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0.01 mm	Bore diameter lower tolerance
D	62 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0.013 mm	Outside diameter lower tolerance
B	28 mm	Width
	0 mm	Width upper tolerance
	-0.25 mm	Width lower tolerance
C _a	29,000 N	Basic dynamic load rating, axial
C _{0a}	64,000 N	Basic static load rating, axial
C _{ua}	2,900 N	Fatigue load limit, axial
n _{G Grease}	5,000 1/min	Limiting speed for grease lubrication
n _g	2,200 1/min	Thermally safe operating speed
M _R	0.5 Nm	Bearing frictional torque
≈m	0.415 kg	Weight

Mounting dimensions

D _{a max}	53 mm	Maximum diameter of housing
d _{a min}	40 mm	Minimum diameter shaft

Dimensions

d ₁	45.5 mm	Rib diameter inner ring
r _{min}	0.3 mm	Minimum chamfer dimension
r _{1 min}	0.6 mm	Minimum chamfer dimension
α	60 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

c_{aL}	850 N/ μ m	Rigidity axial
c_{kL}	300 Nm/mrad	Tilting rigidity
M_m	0.73 kg*cm ²	Mass moment of inertia
	5 μ m	Axial runout
	ZM30	Recommended INA precision locknut for radial locking
	AM30	Recommended INA precision locknut for axial locking
M_A	32 Nm	Tightening torque for the recommended INA precision locknut
	9,947 N	Required locknut force axial