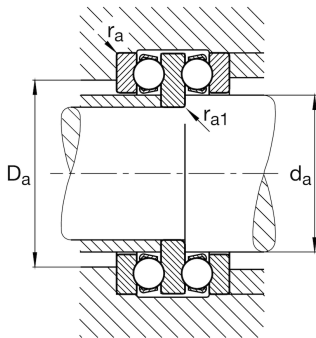
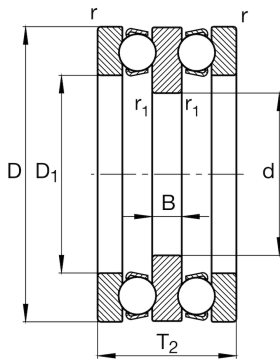


**FAG****52214**

Axial deep groove ball bearing

Axial deep groove ball bearing 522, double direction, steel sheet metal cage

Technical information

**Main Dimensions & Performance Data**

d	55 mm	Inner diameter shaft washer
D	105 mm	Outer diameter housing washer
T ₂	47 mm	Height
C _a	66.000 N	Basic dynamic load rating, axial
C _{0a}	159.000 N	Basic static load rating, axial
C _{ua}	7.200 N	Fatigue load limit, axial
n _G	4.000 1/min	Limiting speed
n _{gr}	4.750 1/min	Reference speed
≈m	1,4 kg	Weight

Mounting dimensions

d _{a max}	70 mm	Maximum diameter shaft shoulder
D _{a max}	84 mm	Maximum diameter of housing shoulder
r _{a max}	1 mm	Maximum filled radius
r _{a1 max}	1 mm	Maximum filled radius

Dimensions

D ₁	72 mm	Inner diameter housing washer
B	10 mm	Height shaft washer
r _{min}	1 mm	Minimum chamfer dimension
r _{1 min}	1 mm	Minimum chamfer dimension

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.

Calculation factors

A	0,16	Minimum load factor
---	------	---------------------