

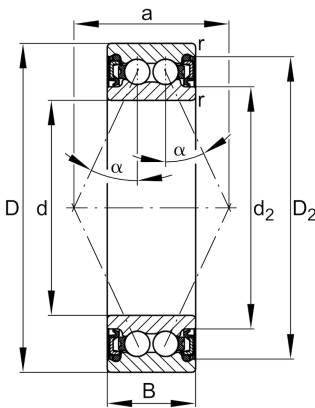
**3805-2Z**

Angular contact ball bearing



Angular contact ball bearing 38.-B-2RZ-TVH, double row, shields, plastic cage

## Technical information

**Main Dimensions & Performance Data**

|             |              |                                   |
|-------------|--------------|-----------------------------------|
| d           | 25 mm        | Bore diameter                     |
| D           | 37 mm        | Outside diameter                  |
| B           | 10 mm        | Width                             |
| $C_r$       | 5.900 N      | Basic dynamic load rating, radial |
| $C_{0r}$    | 5.500 N      | Basic static load rating, radial  |
| $C_{ur}$    | 285 N        | Fatigue load limit, radial        |
| $n_G$       | 15.300 1/min | Limiting speed                    |
| $n_{gr}$    | 10.300 1/min | Reference speed                   |
| $\approx m$ | 0,036 kg     | Weight                            |

**Mounting dimensions**

|              |        |                                      |
|--------------|--------|--------------------------------------|
| $d_{a \min}$ | 27 mm  | Minimum diameter shaft shoulder      |
| $D_{a \max}$ | 35 mm  | Maximum diameter of housing shoulder |
| $r_{a \max}$ | 0,3 mm | Maximum fillet radius                |

**Dimensions**

|            |          |   |
|------------|----------|---|
| $r_{\min}$ | 0,3 mm   | Minimum chamfer dimension                         |
| $D_1$      | 33,12 mm | Shoulder diameter outer ring                      |
| $D_2$      | 34,03 mm | Caliber diameter outer ring                       |
| $d_1$      | 29,1 mm  | Shoulder diameter inner ring                      |
| $d_2$      | 27,92 mm | Caliber diameter inner ring                       |
| a          | 17,9 mm  | Distance between the apexes of the pressure cones |
| $\alpha$   | 25 °     | Contact angle                                     |

**Temperature range**

|            |        |                            |
|------------|--------|----------------------------|
| $T_{\min}$ | -20 °C | Operating temperature min. |
| $T_{\max}$ | 100 °C | Operating temperature max. |

