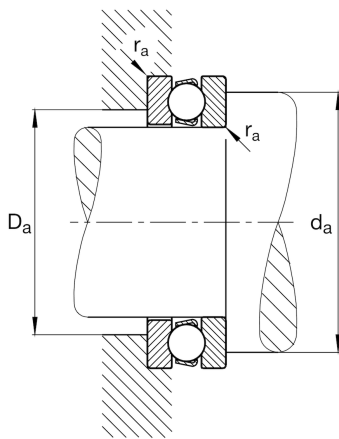
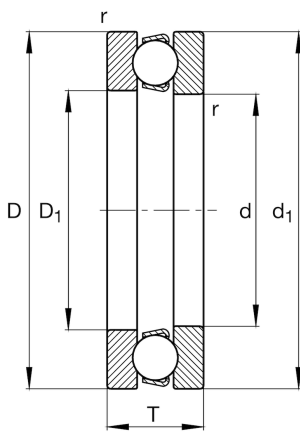


**FAG****51248-MP**

Axial deep groove ball bearing

Axial deep groove ball bearing 512...-MP,
single direction, solid brass cage

Technical information

**Main Dimensions & Performance Data**

d	240 mm	Inner diameter shaft washer
D	340 mm	Outer diameter housing washer
T	78 mm	Height
C_a	435.000 N	Basic dynamic load rating, axial
C_{0a}	1.840.000 N	Basic static load rating, axial
C_{ua}	49.000 N	Fatigue load limit, axial
n_G	1.200 1/min	Limiting speed
n_{gr}	1.510 1/min	Reference speed
$\approx m$	22,7 kg	Weight

Mounting dimensions

$d_{a \min}$	300 mm	Minimum diameter shaft shoulder
$D_{a \max}$	280 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2,1 mm	Maximum filled radius

Dimensions

r_{\min}	2,1 mm	Minimum chamfer dimension
D_1	244 mm	Inner diameter housing washer
d_1	335 mm	Outer diameter shaft washer

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	200 °C	Operating temperature max.

Calculation factors

A	18	Minimum load factor
---	----	---------------------