


FAG

HS71917-E-T-P4S-UL

Angular contact ball bearing

Spindle bearings HS719..-E, adjusted, in pairs or sets, contact angle $\alpha = 15^\circ$, restricted tolerances

Technical information

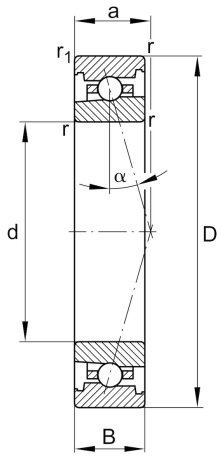

Main Dimensions & Performance Data



d	85 mm	Bore diameter
D	120 mm	Outside diameter
B	18 mm	Width
C_r	20.000 N	Basic dynamic load rating, radial
C_{0r}	16.000 N	Basic static load rating, radial
C_{ur}	1.670 N	Fatigue load limit, radial
$n_{G \text{ Grease}}$	14.000 1/min	Limiting speed for grease lubrication
$n_{G \text{ Oil}}$	22.000 1/min	Limiting speed for oil lubrication
$\approx m$	0,6 kg	Weight

Mounting dimensions

d_a	92 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	114 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a \text{ max}}$	0,6 mm	Maximum recess radius
$r_{a1 \text{ max}}$	0,6 mm	Maximum recess radius
$E_{tk \text{ min}}$	98,5 mm	Minimum diameter injection pitch
$E_{tk \text{ max}}$	99,9 mm	Maximum diameter injection pitch
$E_{tk1 \text{ min}}$	96 mm	Minimum diameter injection pitch
$E_{tk1 \text{ max}}$	99,9 mm	Maximum diameter injection pitch
a	32,9 mm	Distance between the apexes of the pressure cones

Dimensions

r_{min}	1,1 mm	Minimum chamfer dimension
$r_{1 \text{ min}}$	1,1 mm	Minimum chamfer dimension
α	25 °	Contact angle

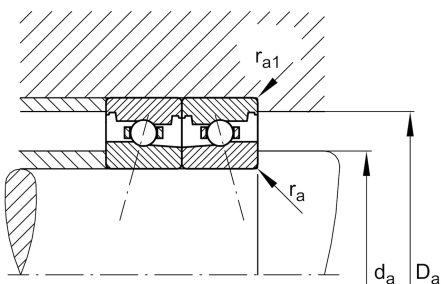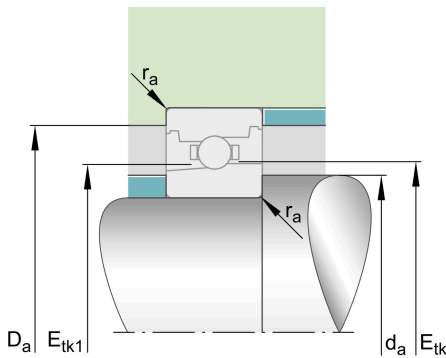



Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.

Additional information

F_{VL}	117 N	Preload force light
F_{VM}	352 N	Preload force medium
F_{VH}	704 N	Preload force heavy
K_{aEL}	338 N	Lift-off force light
K_{aEM}	1.032 N	Lift-off force medium
K_{aEH}	2.102 N	Lift-off force heavy
c_{aL}	140 N/μm	Axial rigidity light
c_{aM}	208 N/μm	Axial rigidity medium
c_{aH}	270 N/μm	Axial rigidity heavy