


Material: St 37

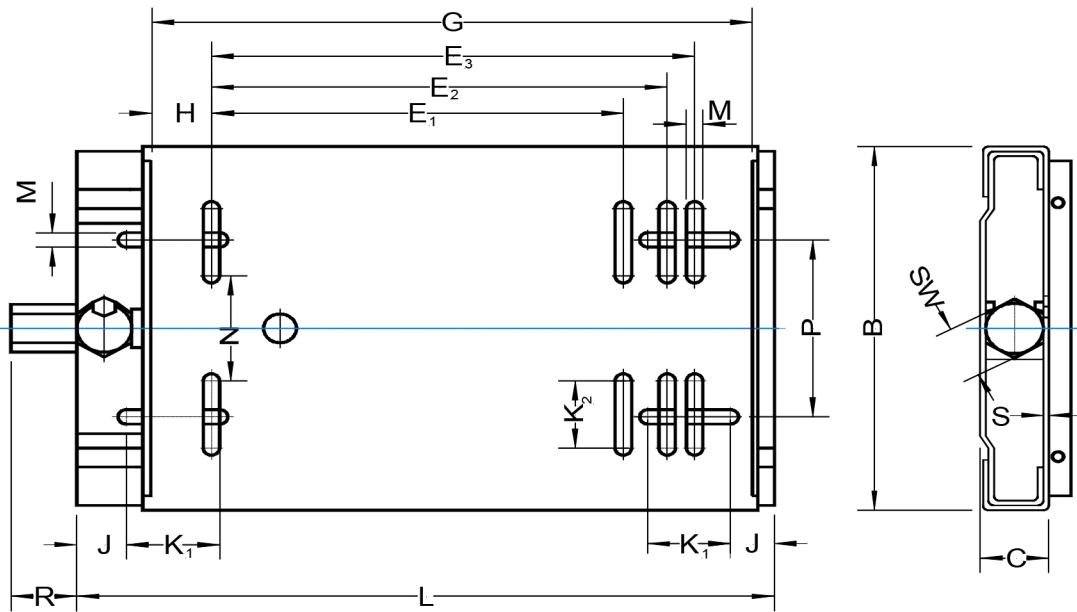

Monoplate-MP	L	B	C	E1	E2	E3	G	H	J	K1	K2	M	N	P	R	SW	S
270 - 63 / 90-MP	270	194	33	100	125	140	190	25	25	50	50	10,5	33	98	20	19	3
307 - 90 / 112-MP	307	213	33	140	160	190	255	32,5	28	50	50	10,5	62	108	20	19	3
340 - 100 / 132-2-MP	340	290	40	160	190	216	286	35	28	63	47,5	12,5	120	165	25	22	4
430 - 100 / 132-MP	430	290	40	160	190	216	286	35	28	63	47,5	12,5	120	165	25	22	4
430 - 160 / 180-2-MP	430	370	40		254	279	379	50	30	62	62	12,5	163	248	25	22	4
490 - 160 / 180-MP	490	370	40		254	279	379	50	30	62	62	12,5	163	248	25	22	4
490 - 180 / 200-MP	490	410	40		279	318	420	50	30	60	52	17	225	285	25	22	4
585 - 200 / 225-MP	585	450	50		318	356	468	56	30	60	52	17	248	300	25	22	5
600 - 250-MP	600	470	65			406	515	54,5	30	60	70	22	229	320	25	28	5
735 - 280-MP	735	570	65			457	585	64	30	70	70	22	320	420	25	28	5

min. Verstellwege V

min. regulation range [mm]

Type	Baugrößen												Gewicht weight [kg]	zul. Zugkraft allowed tractive force [N]					
	installation size																		
	63	80	90	100	112	132	160	180	200	225	250	280							
270	80																3,1	680	
307			52															4,1	940
340				54														7,9	1380
430				144														8,9	1380
430							51											12,0	2000
490							111											12,7	2000
490								70										14,6	2630
585									117									23,7	3800
600												85						28,1	4000
735														150				38,2	4400