




## ZKLN1242-2RS-PE

Axial angular contact ball bearing

Schaeffler ID:  
0027926050000

Axial angular contact ball bearings  
ZKLN..-2RS-PE, Increased tolerances,  
double direction, lip seals on both sides

### Technical information

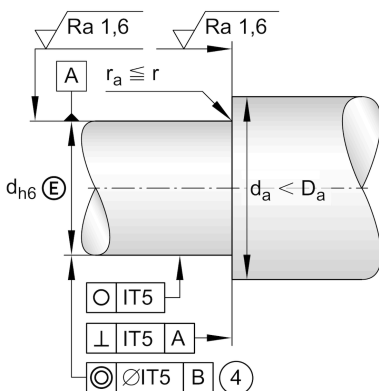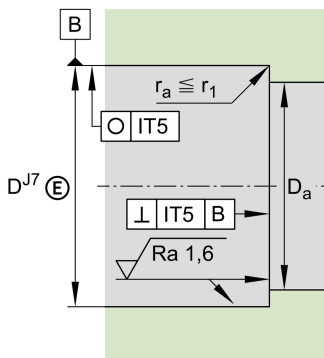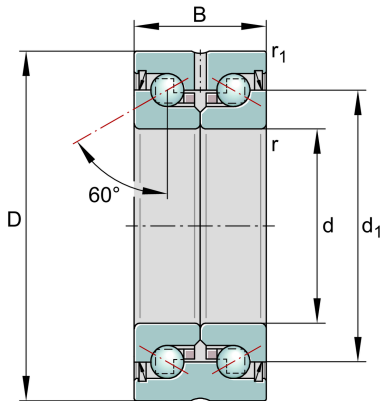

### Main Dimensions & Performance Data

d	12 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0.01 mm	Bore diameter lower tolerance
D	42 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0.011 mm	Outside diameter lower tolerance
B	25 mm	Width
	0 mm	Width upper tolerance
	-0.25 mm	Width lower tolerance
C <sub>a</sub>	17,100 N	Basic dynamic load rating, axial
C <sub>0a</sub>	25,000 N	Basic static load rating, axial
C <sub>ua</sub>	1,140 N	Fatigue load limit, axial
n <sub>G Grease</sub>	9,200 1/min	Limiting speed for grease lubrication
n <sub>g</sub>	3,800 1/min	Thermally safe operating speed
M <sub>R</sub>	0.16 Nm	Bearing frictional torque
≈m	0.197 kg	Weight

### Mounting dimensions

D <sub>a max</sub>	33 mm	Maximum diameter of housing
d <sub>a min</sub>	16 mm	Minimum diameter shaft

### Dimensions

d <sub>1</sub>	25 mm	Rib diameter inner ring
r <sub>min</sub>	0.3 mm	Minimum chamfer dimension
r <sub>1 min</sub>	0.6 mm	Minimum chamfer dimension
α	60 °	Contact angle

### Temperature range

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	120 °C	Operating temperature max.

### Additional information

$c_{aL}$	375 N/ $\mu$ m	Rigidity axial
$c_{kL}$	50 Nm/mrad	Tilting rigidity
$M_m$	0.068 kg*cm <sup>2</sup>	Mass moment of inertia
	5 $\mu$ m	Axial runout
	ZM12	Recommended INA precision locknut for radial locking
$M_A$	8 Nm	Tightening torque for the recommended INA precision locknut
	5,307 N	Required locknut force axial